


Top CMK sign

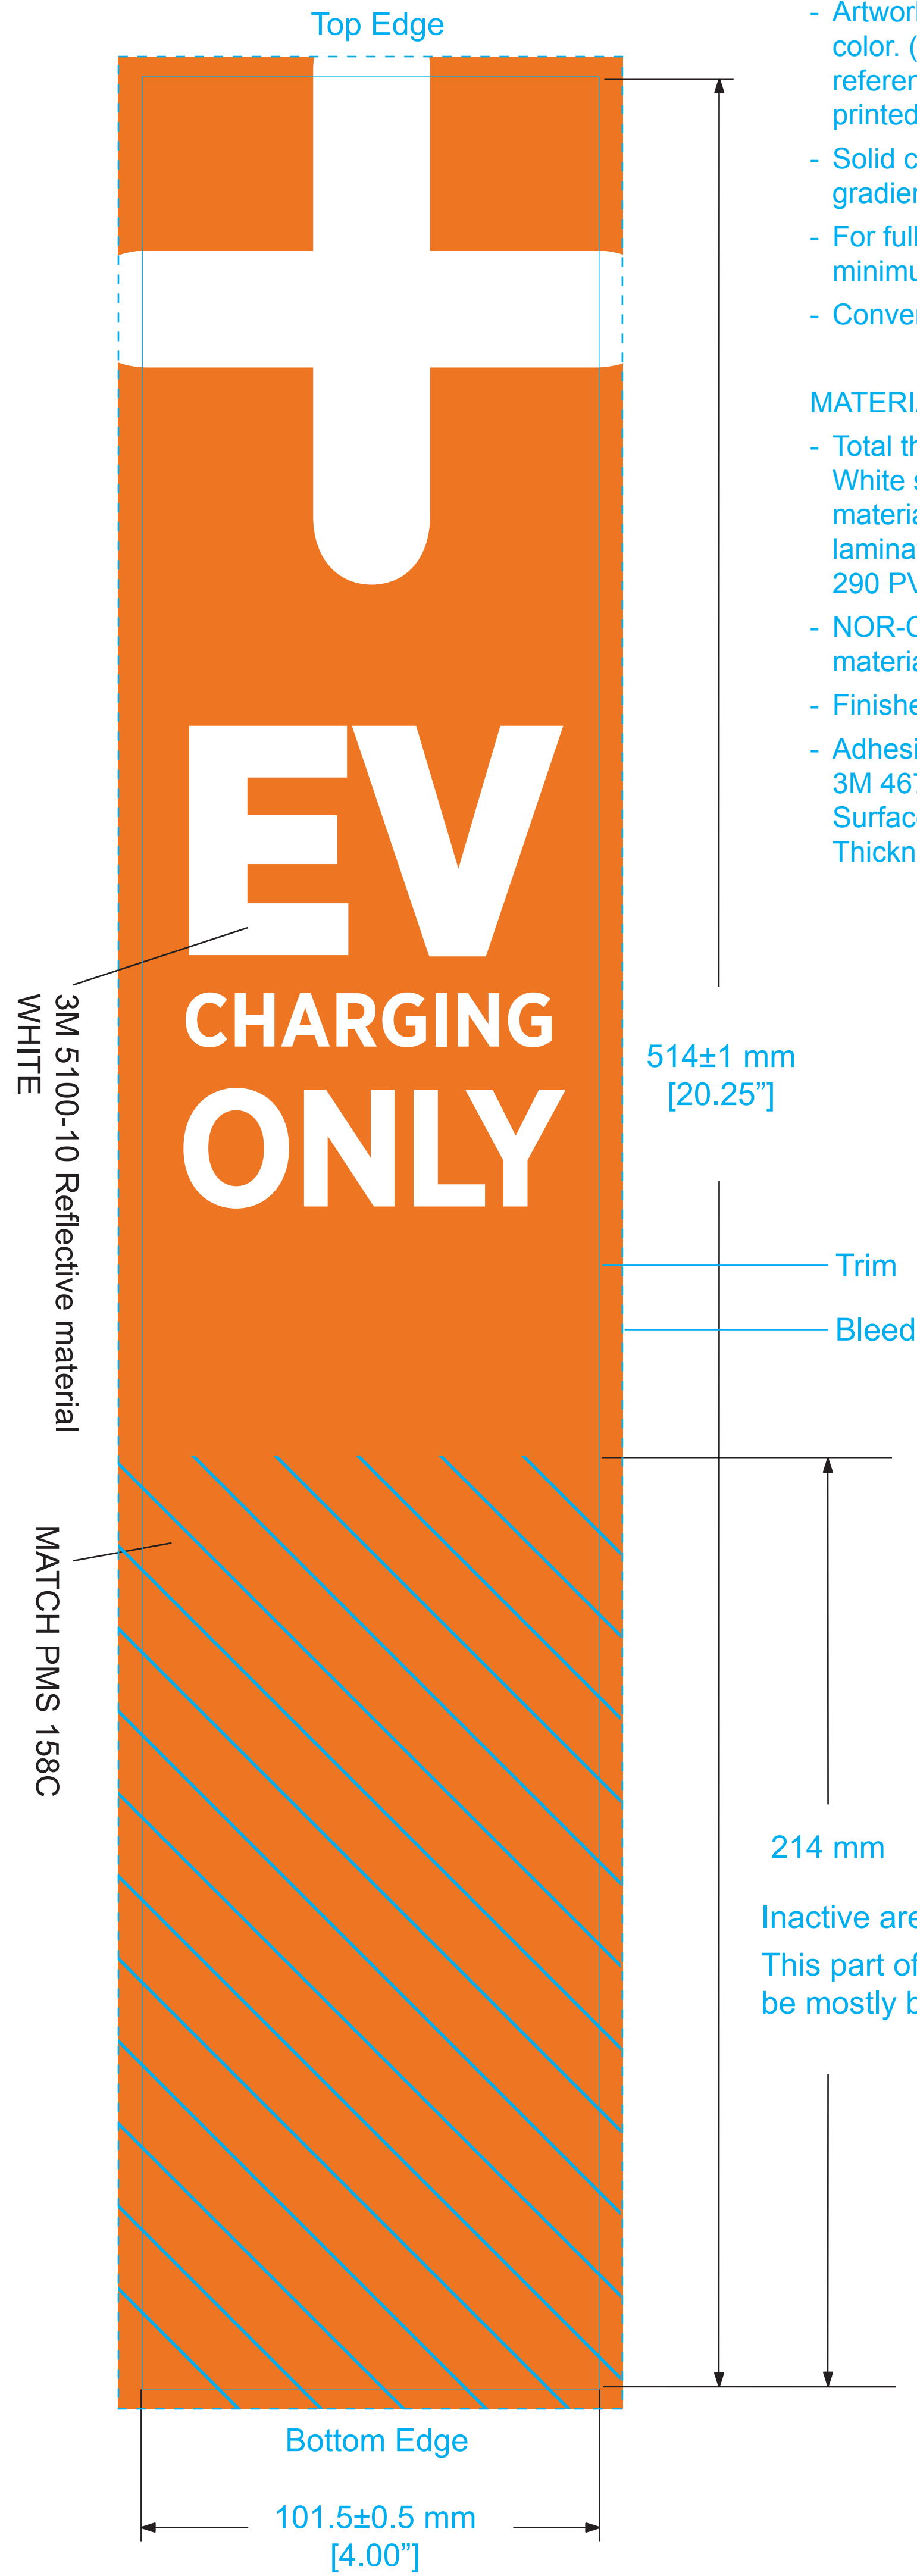

NOTES & REQUIREMENTS

- Artwork must be in **vector** format. Do not use raster images.
- Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
- Solid color only, no transparency or gradients
- For full bleed artwork, provide minimum 5-mm bleed
- Convert all fonts to outlines


MATERIALS

- Total thickness 0.040" max:
White styrene, 0.03" thick; Reflective material 3M 5100-10 white; External laminate 0.002" thick ORAGUARD 290 PVC (for UV protection).
- NOR-COTE XL6 ink over reflective material
- Finished label is ROHS compliant
- Adhesive (Bollard Sign Only):
3M 467MP Acrylic Adhesive on Back Surface w/ Backing. 10-15mm Wide. Thickness: .003 to .007 inches

214 mm

Inactive area.
This part of the sign will be mostly behind the helmet.

Bottom bollard sign

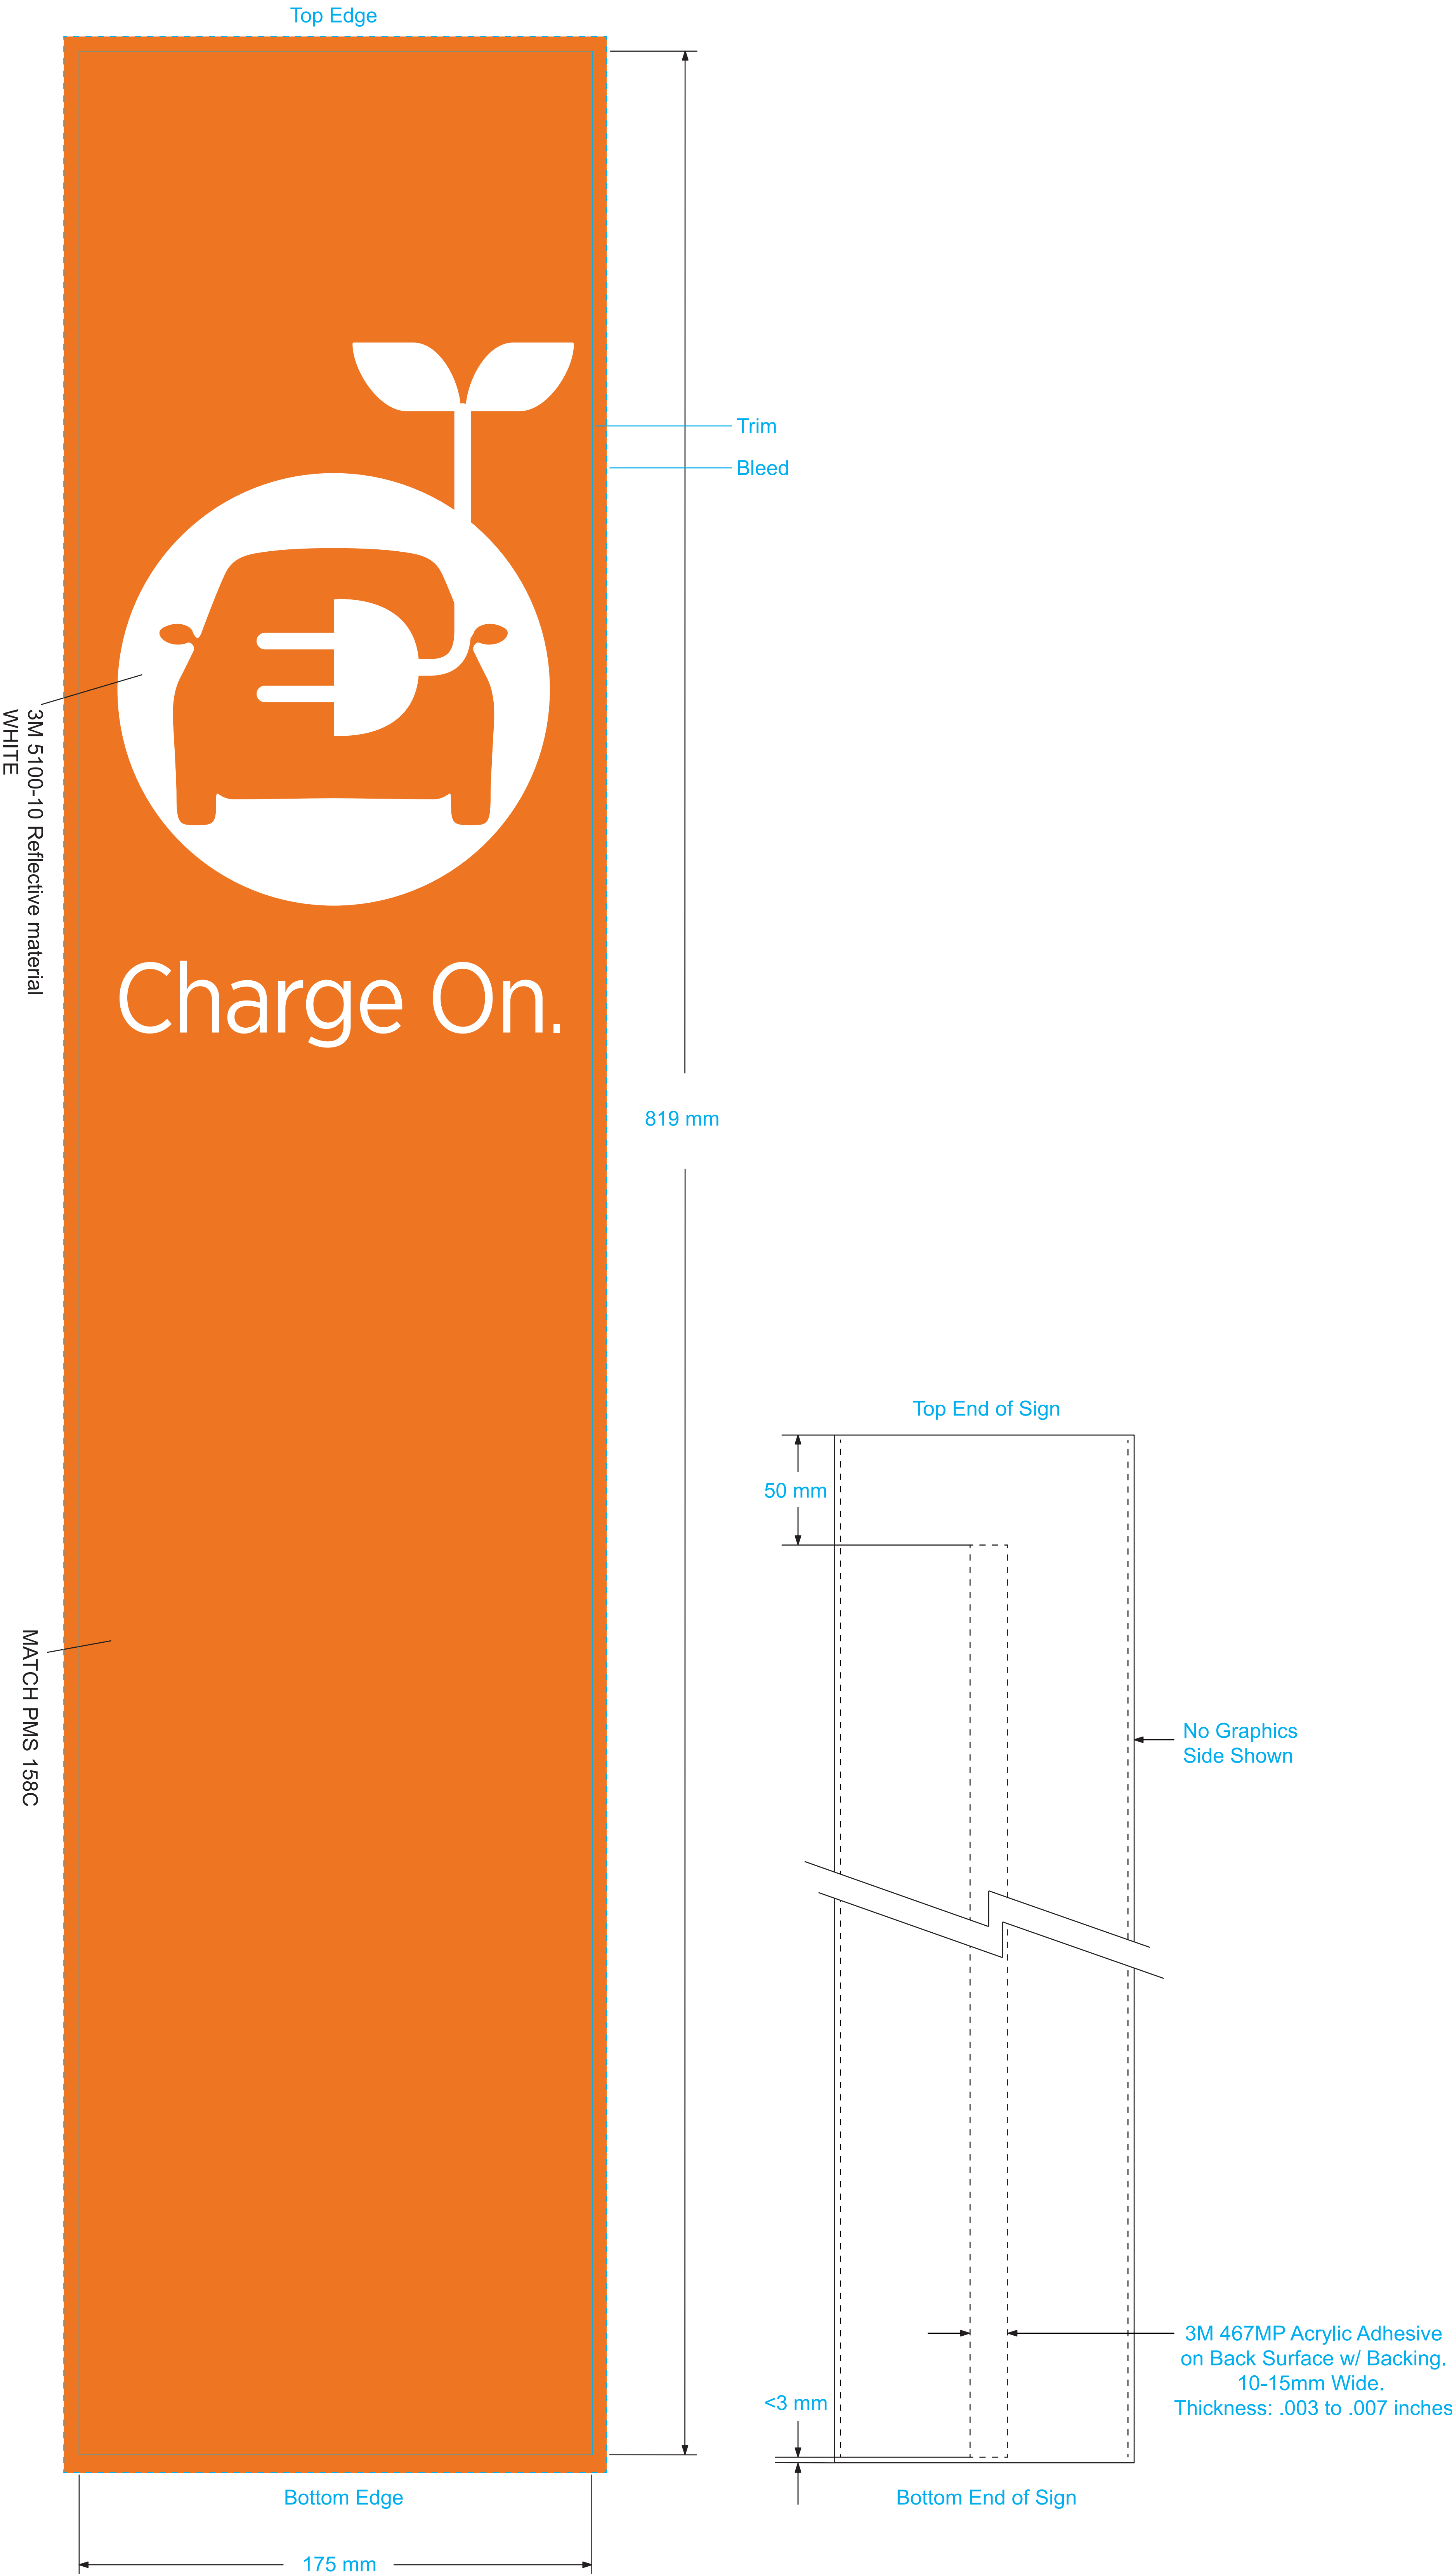

Back bollard sign

