


Top CMK sign

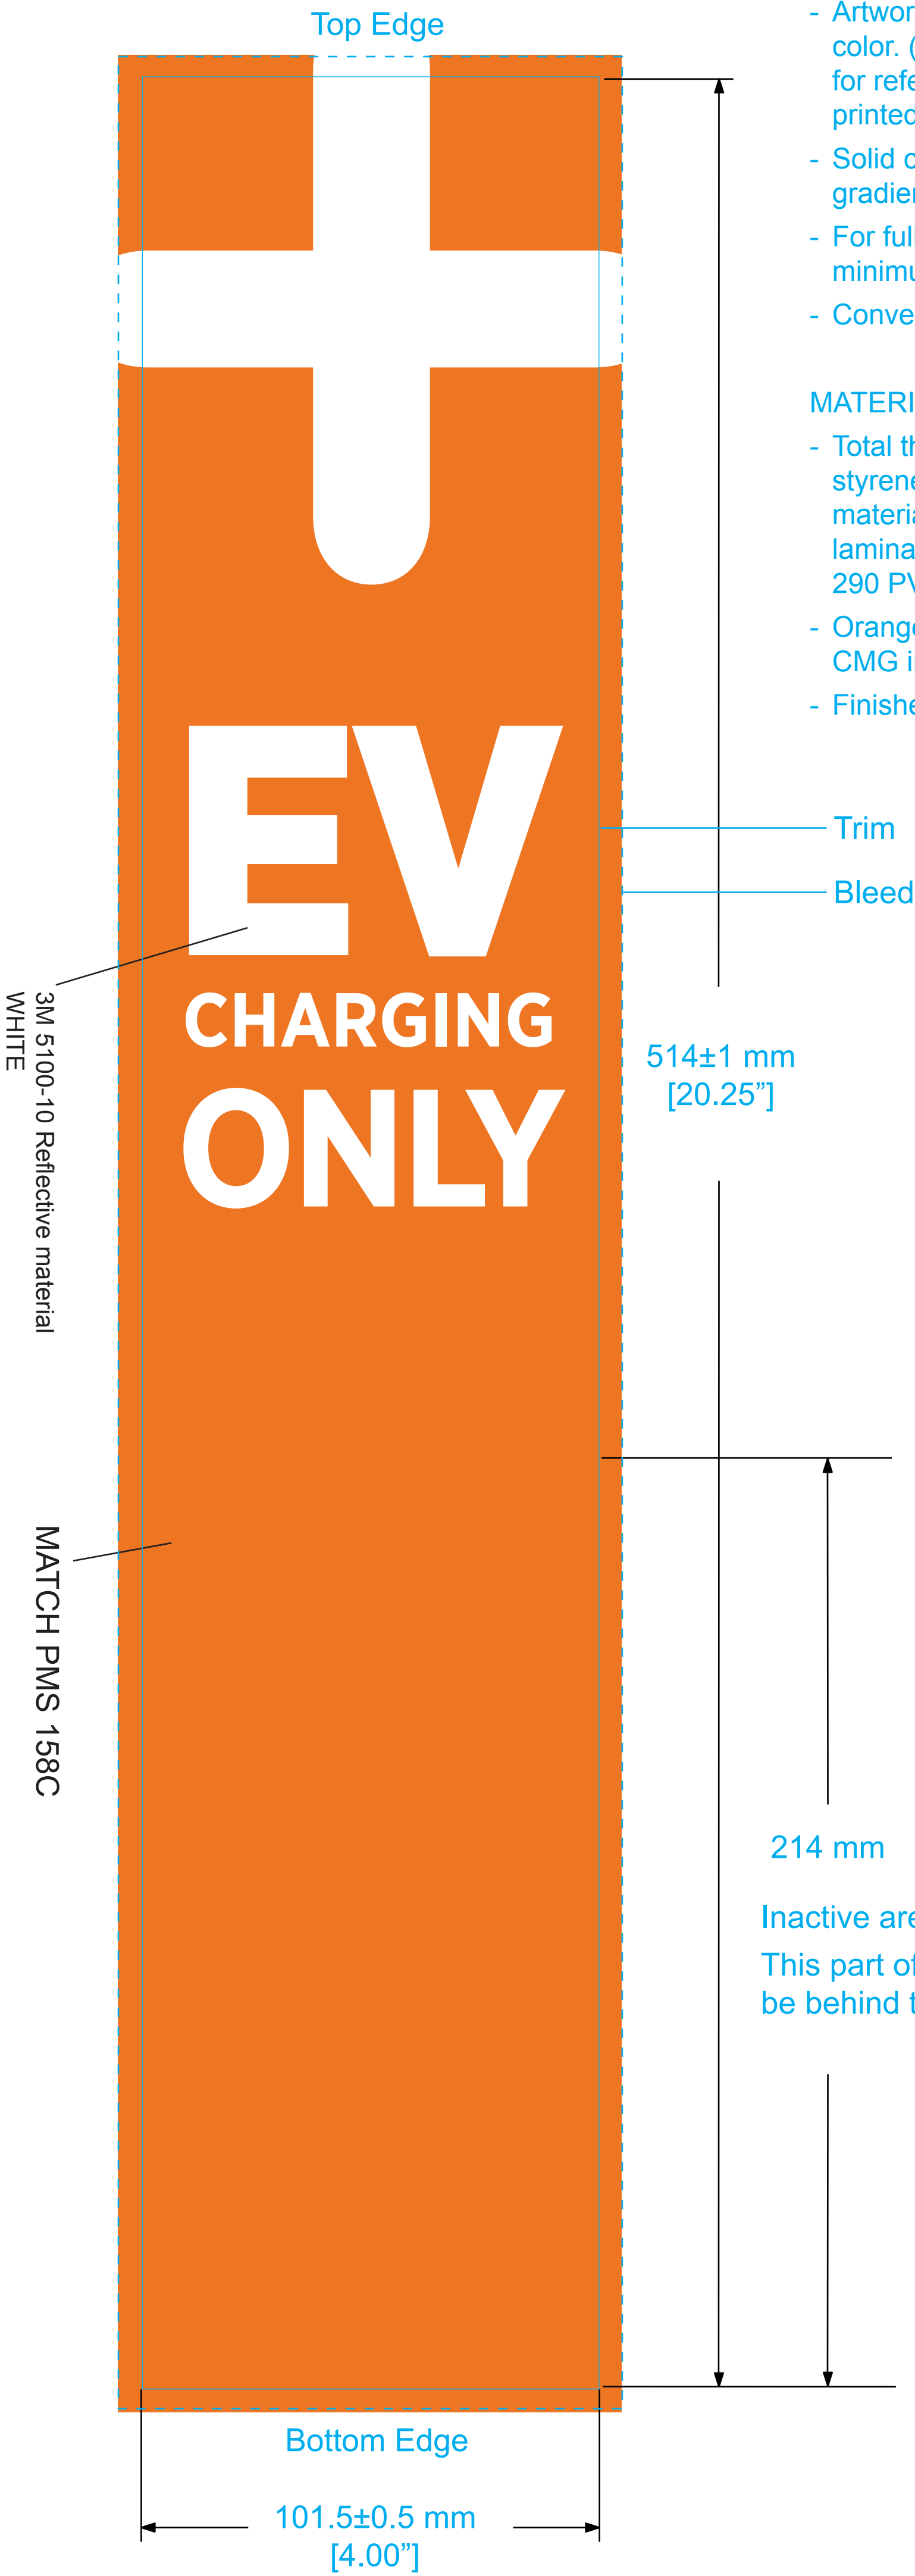

NOTES & REQUIREMENTS

- Artwork must be in **vector** format. Do not use raster images.
- Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
- Solid color only, no transparency or gradients
- For full bleed artwork, provide minimum 5-mm bleed
- Convert all fonts to outlines

MATERIALS

- Total thickness 0.040" max: White styrene, 0.03" thick; reflective material, 3M 5100 white; external laminate 0.002" thick ORAGUARD 290 PVC.
- Orange NOR-COTE weatherable CMG ink over reflective material
- Finished label is ROHS compliant

Inactive area.
This part of the sign will
be behind the helmet.

Bottom bollard sign

Top Edge



Trim

Bleed

819 mm

3M 5100-10 Reflective material
WHITE

MATCH PMS 158C

Bottom Edge

175 mm