


WITHOUT DISPLAY  
EXPRESS PLUS POWER LINK  
CUSTOM SIGN TEMPLATE  
- FRONT TOP

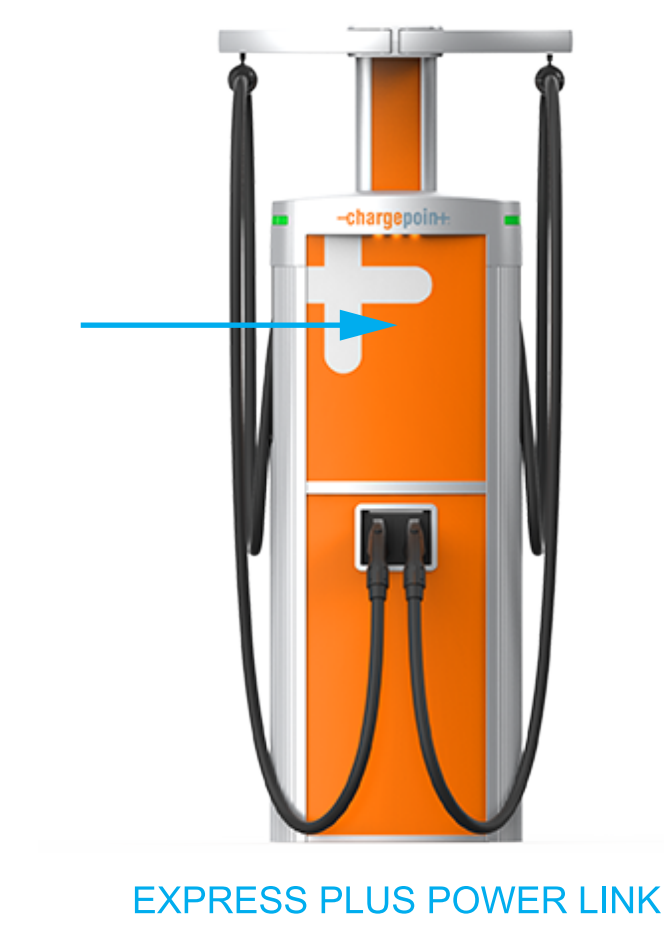


- NOTES & REQUIREMENTS
- Artwork must be in **vector** format. Do not use raster images.
  - Artwork must be in CMYK process colour. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
  - Solid colour only, no transparency or gradients
  - For full-bleed artwork, provide minimum 5-mm bleed
  - Convert all fonts to outlines
  - \* ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).

- MATERIALS
- Total thickness 1.016 mm max, comprised of:
1. Substrate:
    - a. White styrene, 0.762 mm thick
    - b. Non-reflective graphic film
    - c. Colour: White.
  2. UV-curable, lightfast ink:
    - a. Opacity: High.
    - Gloss: High.
    - Formulation: Automotive grade.
    - Performance: 5 years.
  3. External PVC laminate:
    - a. Thickness: 2 mm.
    - Opacity: Clear.
    - UV Protection extension factor: 4 years
  - b. In North America: 0.0508 mm thick ORAGUARD 290 PVC

Finished label is ROHS compliant.

ChargePoint standard artwork is included for reference only.  
Place custom artwork on the CUSTOMER ARTWORK layer:

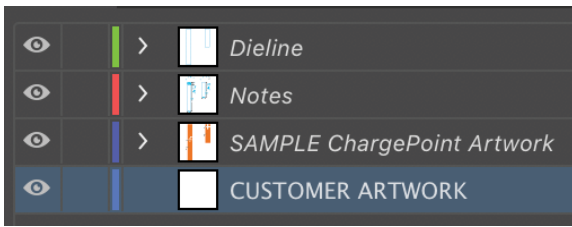

B-5106EB Thermal Transfer Printable White Polyester

Match to PMS 158 Orange  
NOR-COTE weatherable CMG ink

3M680CR-10 Matrix Adhesive

White, Static Cling, Vinyl,  
General Formulations, 208-27

3M 476MP, ACRYLIC ADHESIVE ON BACK SURFACE W/BACKING  
12 mm x 705 mm ACRYLIC ADHESIVE W/BACKING (QTY 3)

523.36 mm ± 1 mm

729 ± 1 mm

BLEED  
Extend artwork to this edge

TRIM TO THIS OUTLINE  
(DIELINE/NOT PRINTED)

SAFE ZONE (NOT PRINTED)  
Approximately 10-mm perimeter  
artwork may not be visible  
(behind frame)


724.76 ± 1 mm

521.86 mm ± 1 mm

SCALE 1.000

CYAN REPRESENTS PMS WHITE

WITHOUT DISPLAY  
EXPRESS PLUS POWER LINK  
CUSTOM SIGN TEMPLATE  
- FRONT BOTTOM

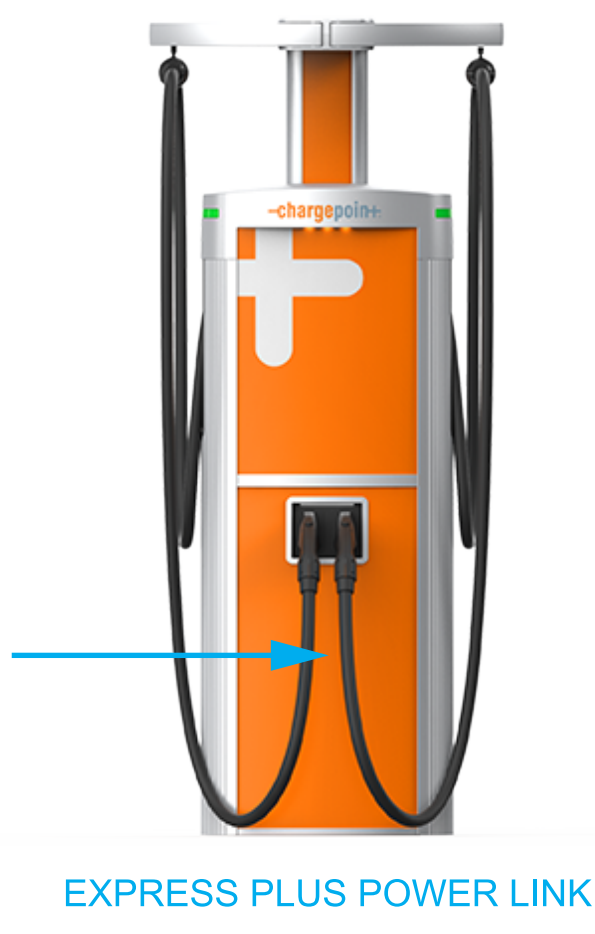

NOTES & REQUIREMENTS

- Artwork must be in **vector** format.  
Do not use raster images.
- Artwork must be in CMYK process colour.  
(Call out any PMS numbers for reference,  
but artwork is screen printed using  
CMYK only.)
- Solid colour only, no transparency or  
gradients
- For full-bleed artwork, provide minimum  
5-mm bleed
- Convert all fonts to outlines
- \* ChargePoint artwork and notes are included  
as reference (ChargePoint Reference  
Artwork layer).


MATERIALS

Total thickness 1.016 mm max, comprised of:

- Substrate:
  - White styrene, 0.762 mm thick
  - Non-reflective graphic film
  - Colour: White.
- UV-curable, lightfast ink:
  - Opacity: High.  
Gloss: High.  
Formulation: Automotive grade.  
Performance: 5 years.
  - In North America: NOR-COTE XL6 ink.
- External PVC laminate:
  - Thickness: 2 mm.  
Opacity: Clear.  
UV Protection extension factor: 4 years
  - In North America: 0.0508 mm thick  
ORAGUARD 290 PVC

Finished label is ROHS compliant.

ChargePoint standard artwork  
is included for reference only.  
Place custom artwork on the  
CUSTOMER ARTWORK layer:

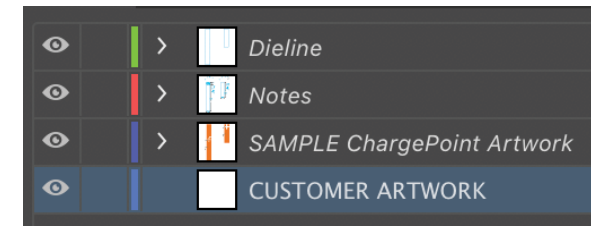


Match to PMS 158 Orange  
NOR-COTE weatherable CMG ink

3M680CR-10 Matrix Adhesive

White, Static Cling, Vinyl,  
General Formulations 208-27

B-5106EB Thermal Transfer Printable White Polyester

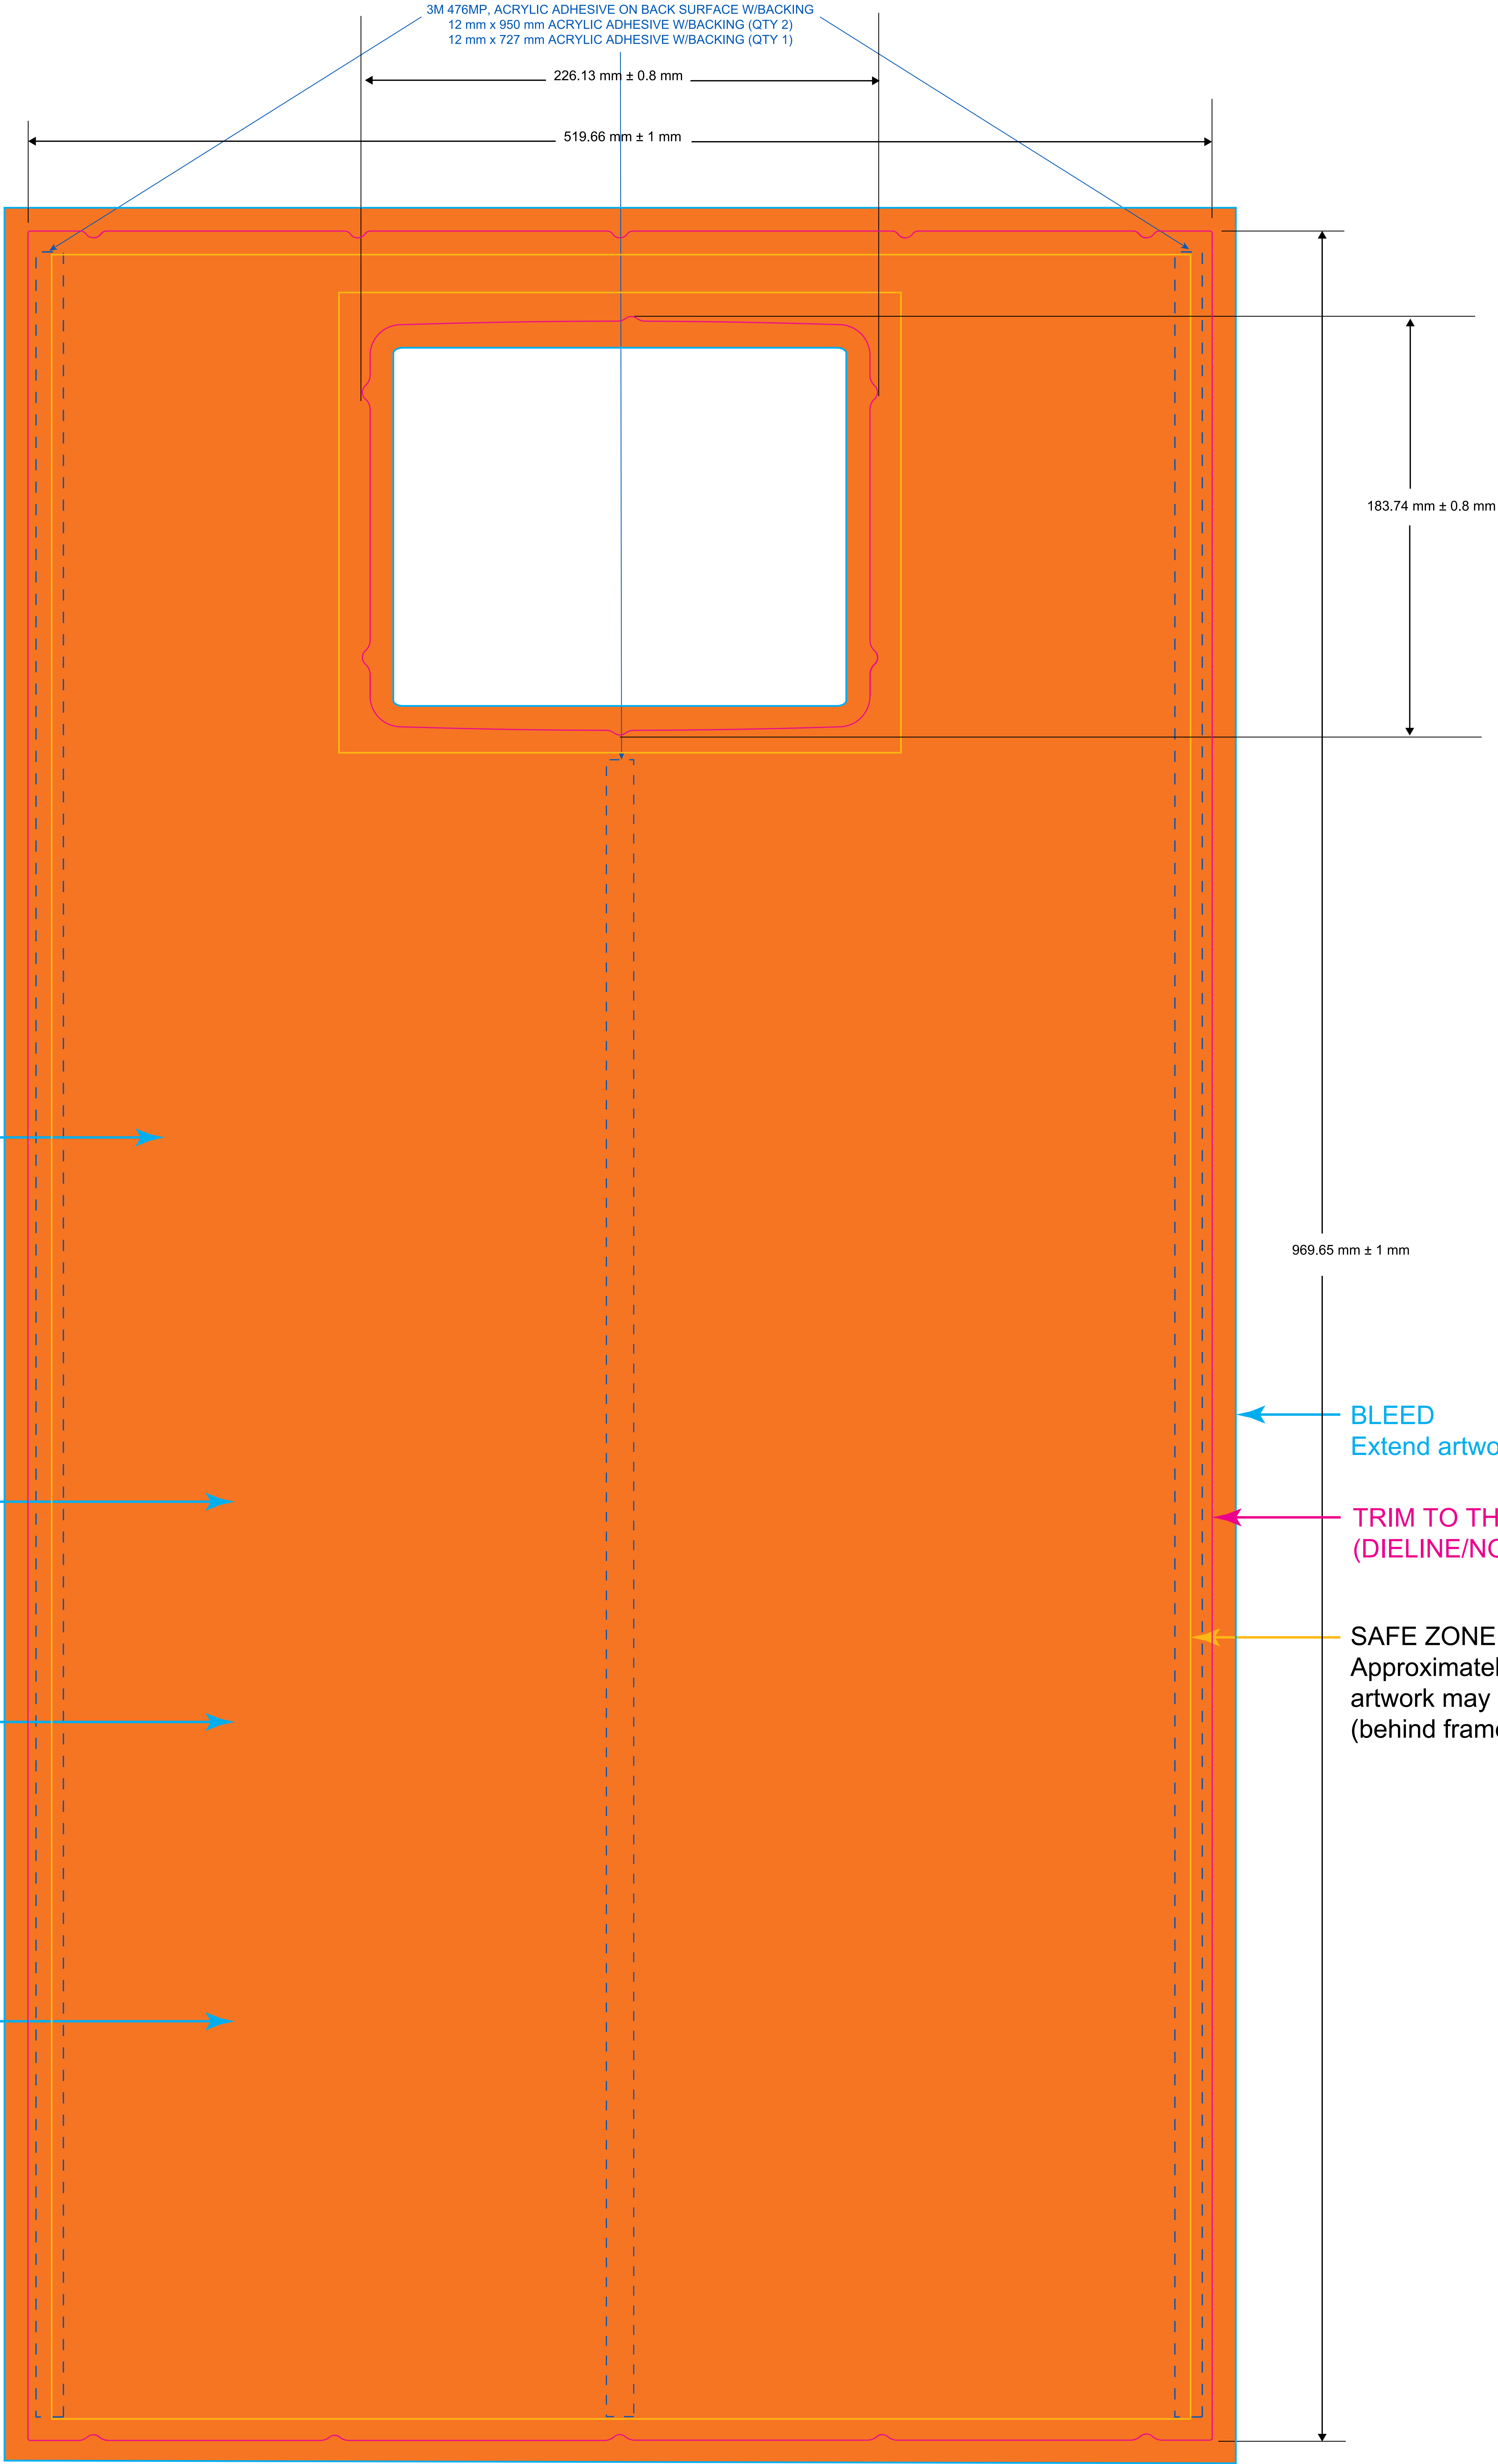

SCALE 1.000



WITHOUT DISPLAY  
EXPRESS PLUS POWER LINK  
CUSTOM SIGN TEMPLATE  
- FRONT CMK





- NOTES & REQUIREMENTS
- Artwork must be in **vector** format. Do not use raster images.
  - Artwork must be in CMYK process colour. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
  - Solid colour only, no transparency or gradients
  - For full-bleed artwork, provide minimum 5-mm bleed
  - Convert all fonts to outlines
  - \* ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).

MATERIALS  
Total thickness 1.016 mm max, comprised of:

1. Substrate:
  - a. White styrene, 0.762 mm thick
  - b. Non-reflective graphic film
  - c. Colour: White.
2. UV-curable, lightfast ink:
  - a. Opacity: High.  
Gloss: High.  
Formulation: Automotive grade.  
Performance: 5 years.
  - b. In North America: NOR-COTE XL6 ink.
3. External PVC laminate:
  - a. Thickness: 2 mm.  
Opacity: Clear.  
UV Protection extension factor: 4 years
  - b. In North America: 0.0508 mm thick  
ORAGUARD 290 PVC


Finished label is ROHS compliant.

ChargePoint standard artwork is included for reference only.  
Place custom artwork on the CUSTOMER ARTWORK layer:

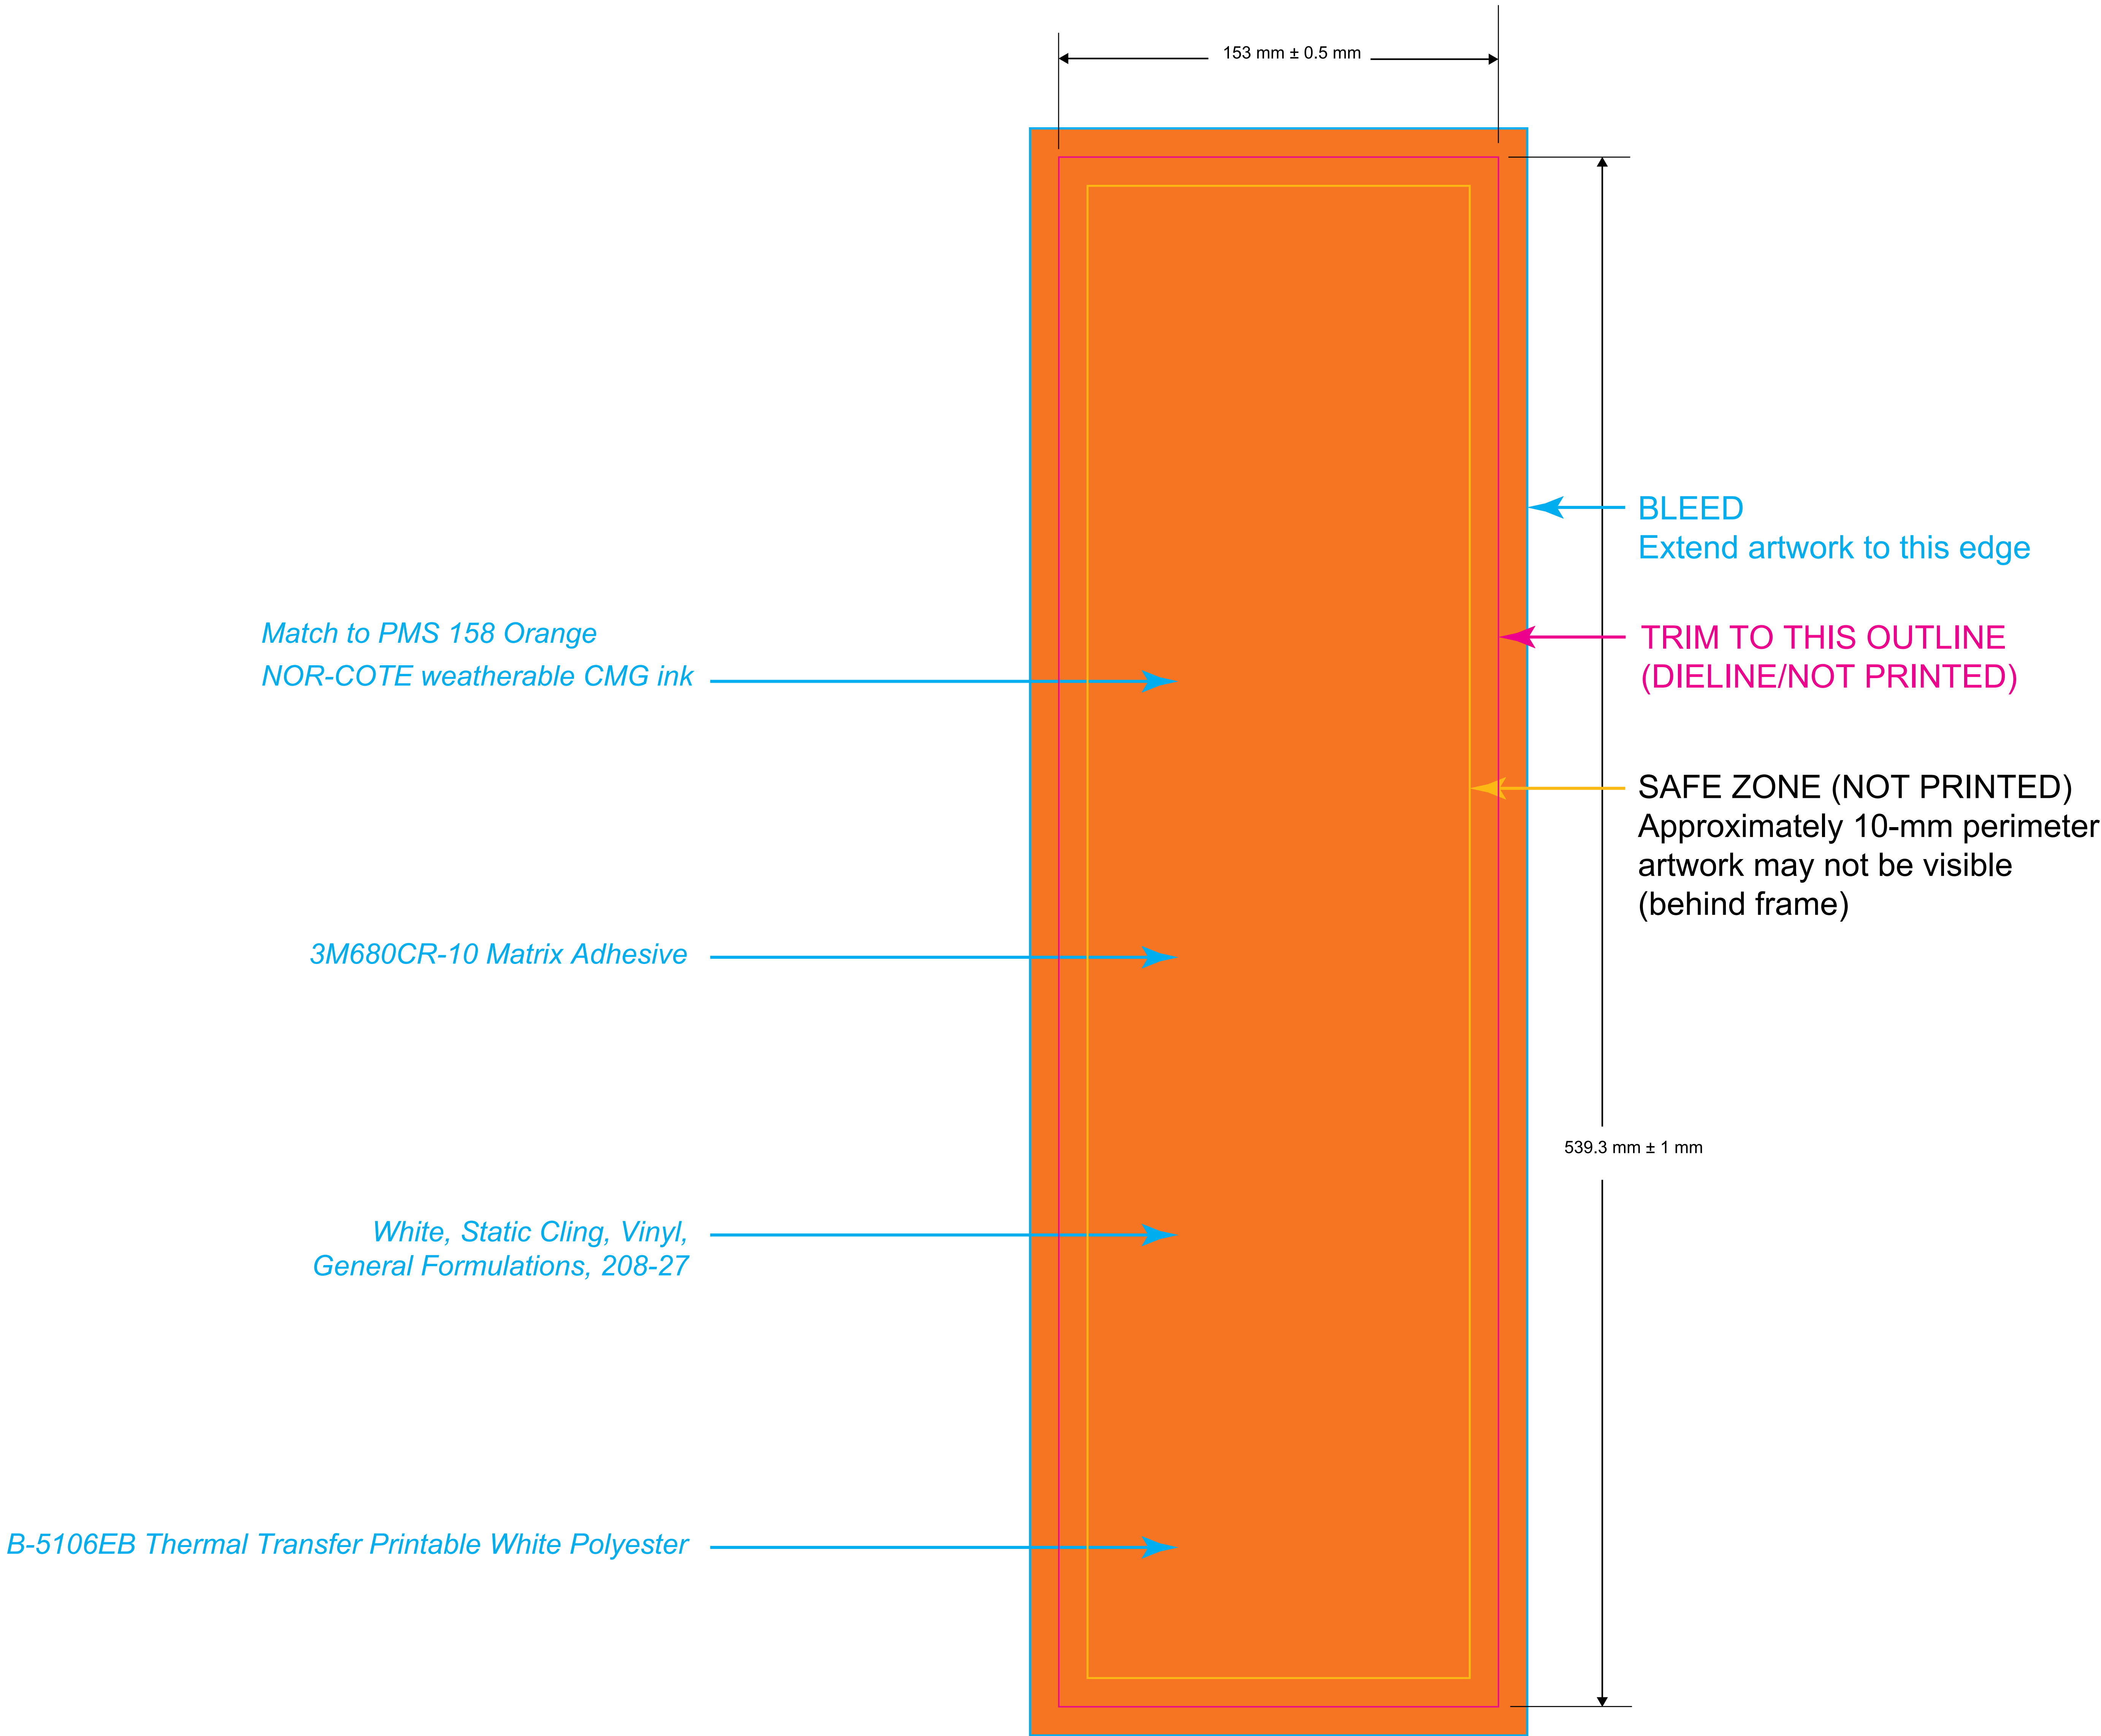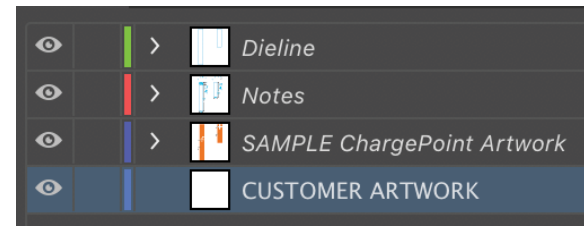

SCALE 1.000

WITHOUT DISPLAY  
EXPRESS PLUS POWER LINK  
CUSTOM SIGN TEMPLATE  
- BACK CMK

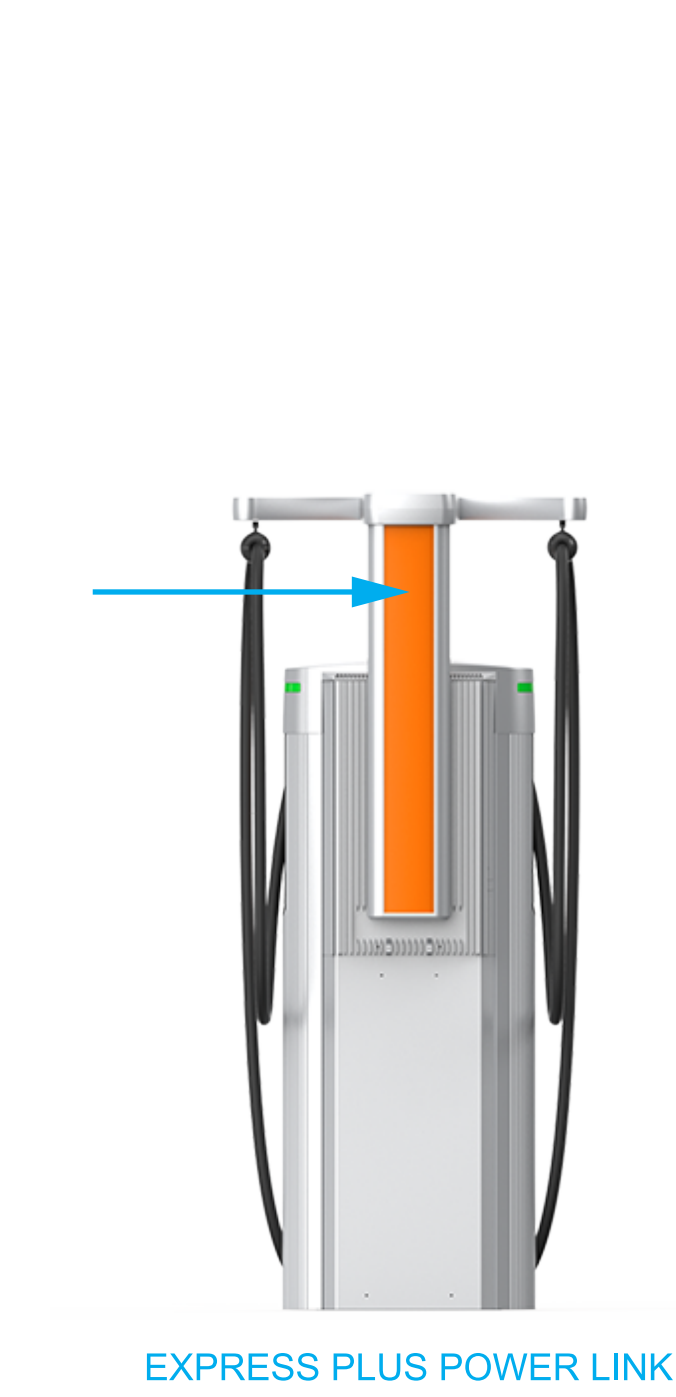

NOTES & REQUIREMENTS

- Artwork must be in **vector** format. Do not use raster images.
- Artwork must be in CMYK process colour. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
- Solid colour only, no transparency or gradients
- For full-bleed artwork, provide minimum 5-mm bleed
- Convert all fonts to outlines
- \* ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).

MATERIALS



Total thickness 1.016 mm max, comprised of:

1. Substrate:
  - a. White styrene, 0.762 mm thick
  - b. Non-reflective graphic film
  - c. Colour: White.
2. UV-curable, lightfast ink:
  - a. Opacity: High.  
Gloss: High.  
Formulation: Automotive grade.  
Performance: 5 years.
  - b. In North America: NOR-COTE XL6 ink.
3. External PVC laminate:
  - a. Thickness: 2 mm.  
Opacity: Clear.  
UV Protection extension factor: 4 years
  - b. In North America: 0.0508 mm thick  
ORAGUARD 290 PVC

Finished label is ROHS compliant.

ChargePoint standard artwork is included for reference only.

Place custom artwork on the CUSTOMER ARTWORK layer:

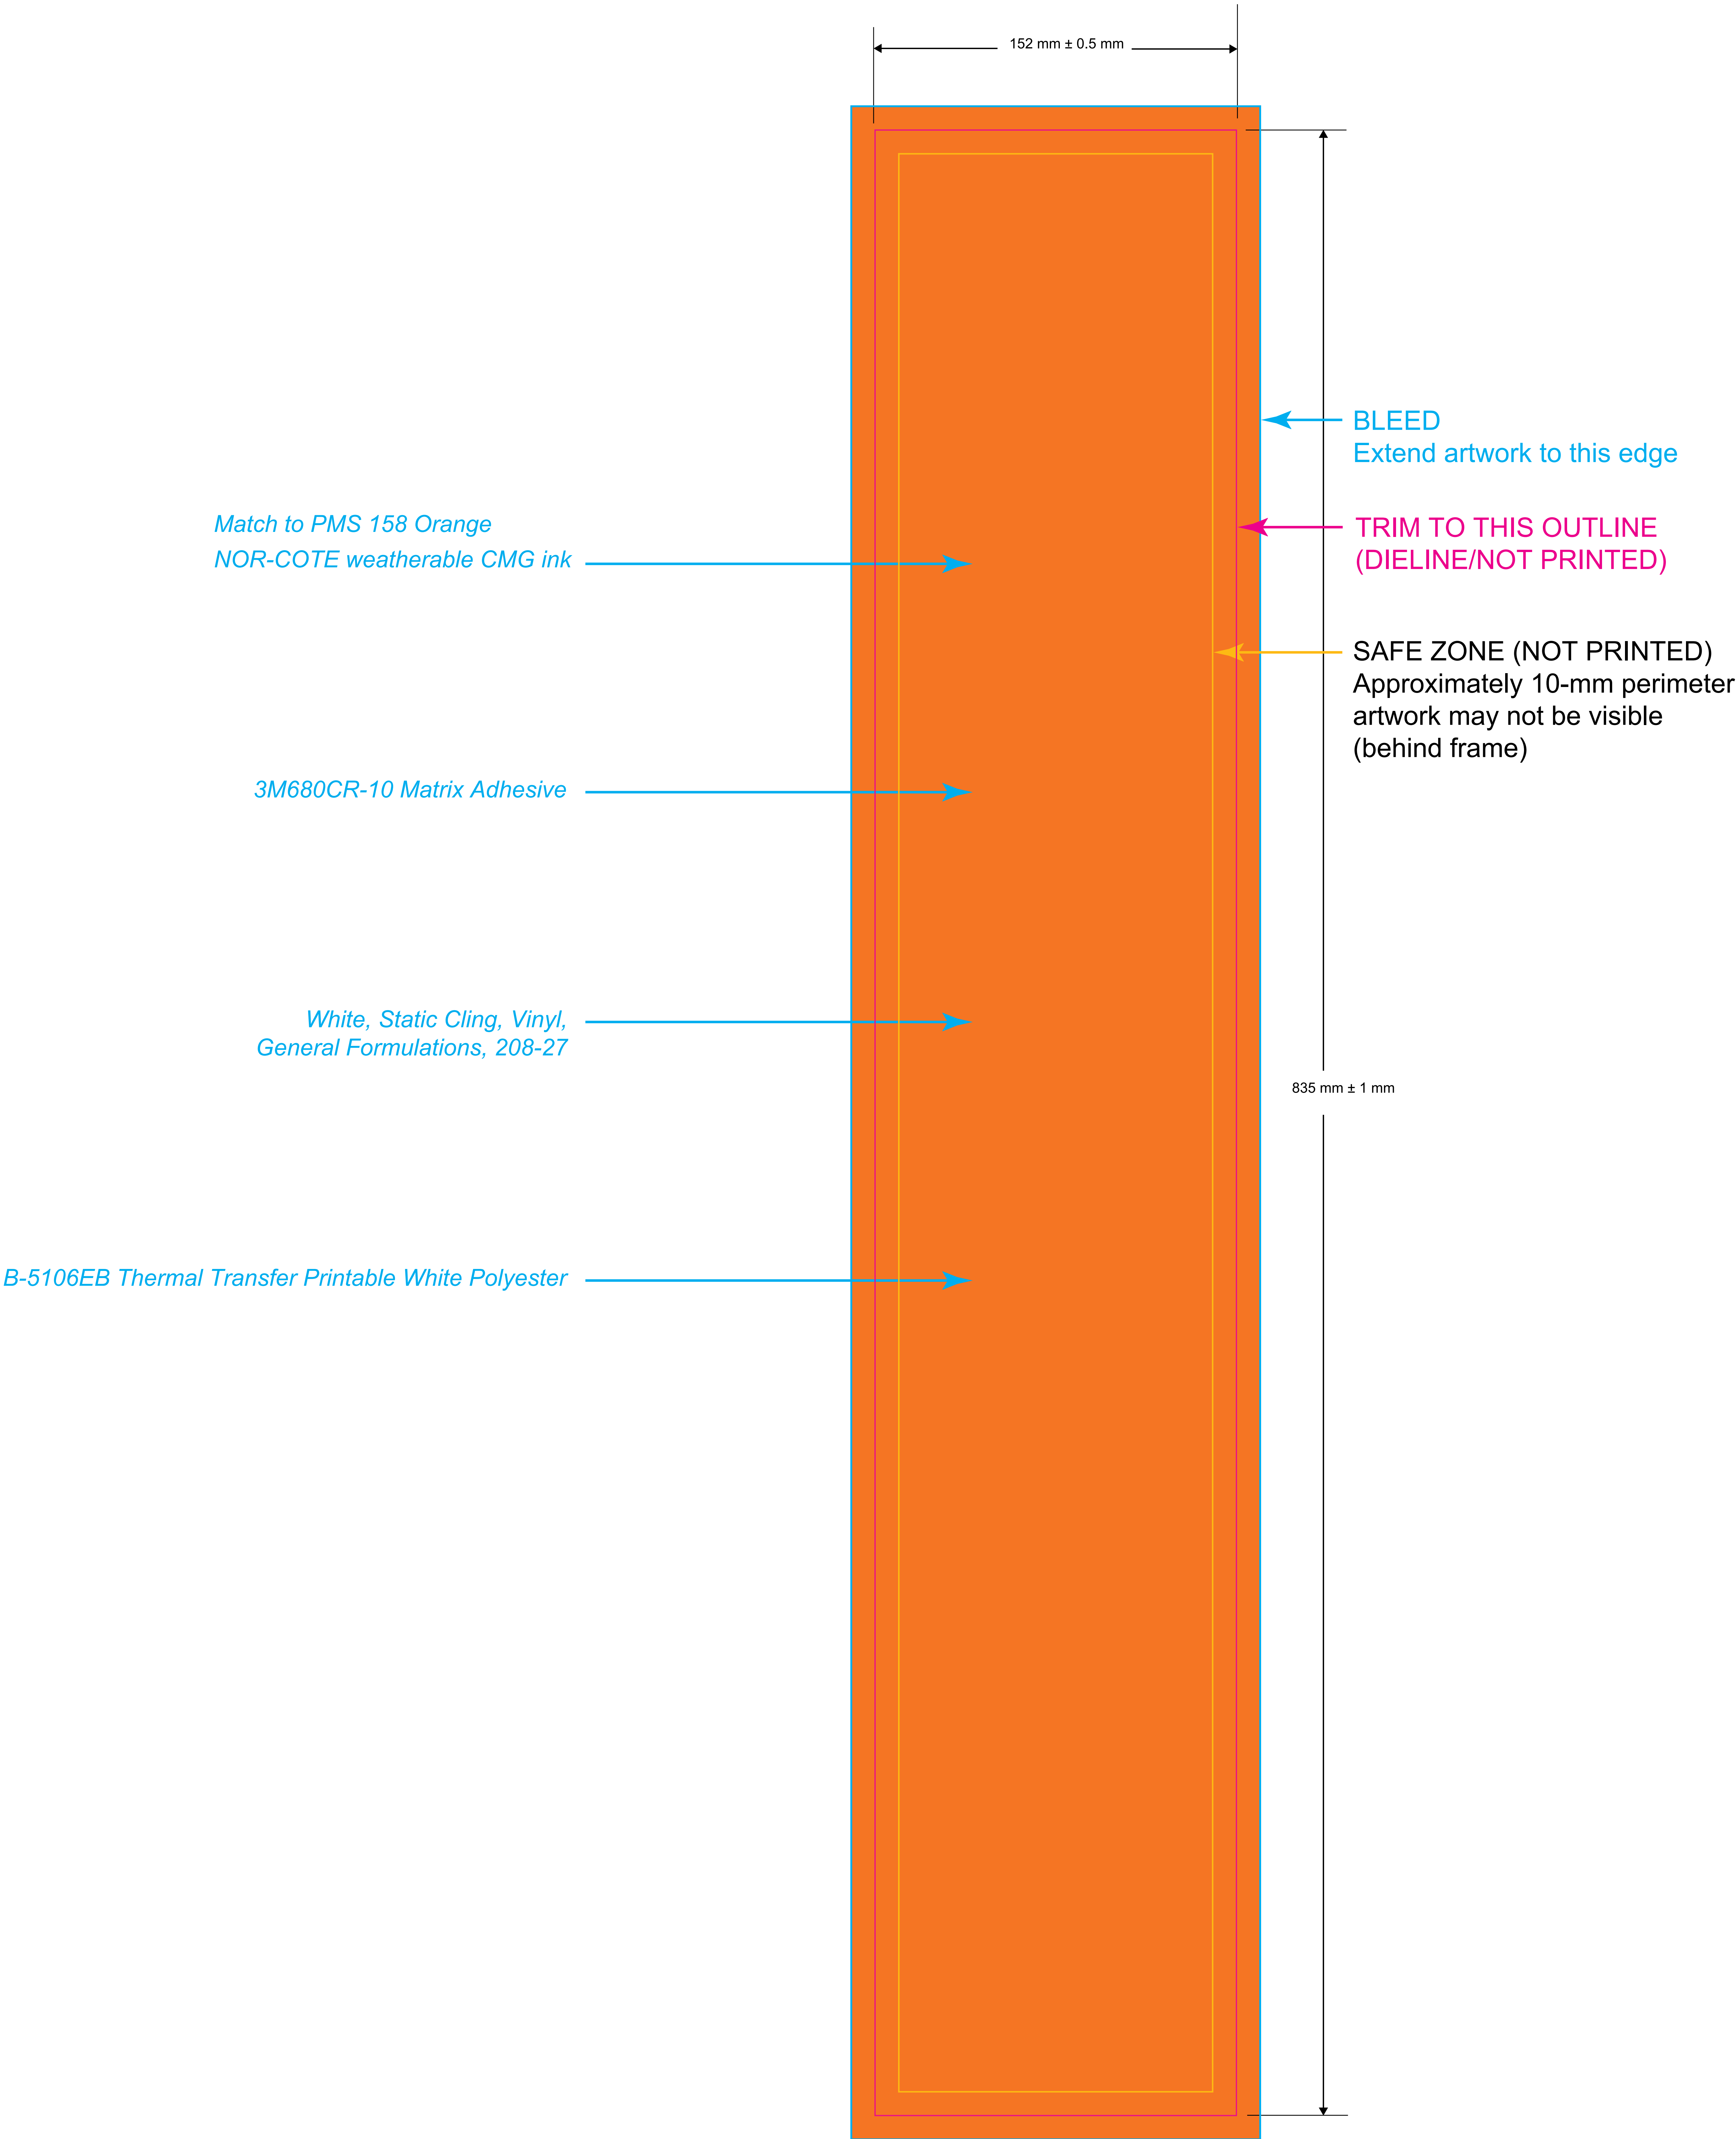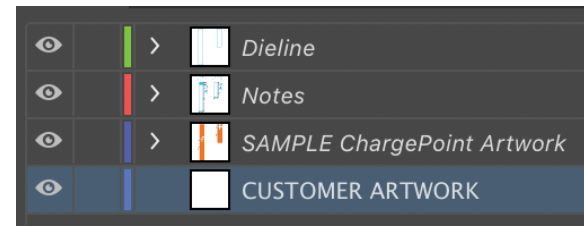

SCALE 1.000